


LOW PROFILE CONCRETE ENDWALL AT EACH END OF CULVERT (REFER SD470 FOR DETAILS). INSTALL PRECAST CONCRETE DRIVEABLE ENDWALL TO VICROADS SD1991 (BOTH ENDS OF CULVERT) WHEN ENDWALL IS WITHIN 1.5m OF THE EDGE OF SEAL.

125 THICK R.C. (25 MPA MIN) VEHICLE CROSSING WITH SL72 MESH 50mm BELOW TOP.

PLAN

NOTES:

1. THIS ARRANGEMENT IS INTENDED FOR RURAL LOW DENSITY RESIDENTIAL ACCESS WAYS.
2. COUNCIL RESERVES THE RIGHT TO DIRECT THE USE OF CULVERT END WALL TYPE.
3. THIS IS A TYPICAL CROSSING PLAN. SLIGHT VARIATIONS MAY OCCUR AFTER INSPECTION AND APPROVAL OF LOCATION BY COUNCIL.
4. PRIOR TO THE CONSTRUCTION, THE CROSSING LOCATION SHALL BE APPROVED BY COUNCIL.
5. ALL WORKS TO BE COMPLETED TO THE SATISFACTION OF COUNCIL.
6. MAINTENANCE OF THE CROSSOVER REMAINS THE RESPONSIBILITY OF THE LAND OWNER.
7. DRIVEABLE ENDWALLS TO BE USED WITHIN 1.5m OF THE EDGE OF SEAL
8. TABLE DRAINS ARE NOT TO BE CLOSER THAN 1.0m FROM FENCE LINES OR SERVICES.
9. CULVERT TO BE LOCATED AT LEAST 600mm FROM EDGE OF SEAL

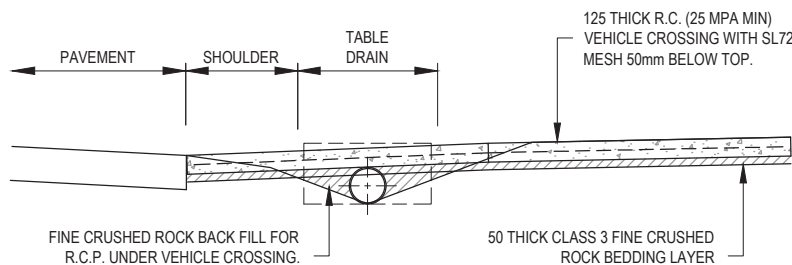

SECTION A-A

ALL MEASUREMENTS IN MILLIMETRES

**TYPICAL SWALE DRAIN VEHICLE CROSSING
(FRINGE URBAN RESIDENTIAL ENTRANCE)**

LAST UPDATED 20/07/2015

SD 260

NOT TO SCALE

Infrastructure Design Manual Standard Drawings

A copy of the Infrastructure Design Manual can be viewed on the Design Manual website www.designmanual.com.au